



AD-SC25

4K 180° Panoramic Camera



- **180° Field of view**

The panoramic full-room coverage makes the most of your limited space with full-picture immersive technology that provides wall-to-wall coverage.

■ AD-SC25



- **Triple 12 MP cameras**
- **4K UHD clarity**

With the advanced optics and breakthrough technology, the AD-SC25 delivers vividly superior video conferencing. The 4K UHD resolution sets redefines crispness and clarity for your remote collaboration experience.

AD-SC25



Manual Mode



Presentation Mode



Compose Mode



Body-Fit Mode




Grid Mode



• 1-click video layout switch

Free from special training or complicated software operations. Simply tap the top of the camera to switch video layout.

■ AD-SC25

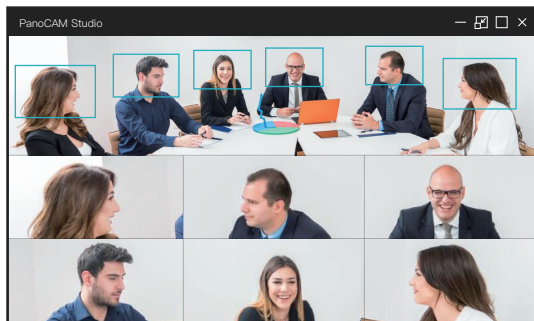

Compose Mode

Combining a panoramic view with closeups, you can view the whole room while seeing 6 key participants in closeup.




Manual Mode

Zoom into a specific area anywhere in the room.

• Five video layouts


The AD-SC25 offers layout options to suit every communication scenario, catering to different meeting spaces and number of attendees.

AD-SC25

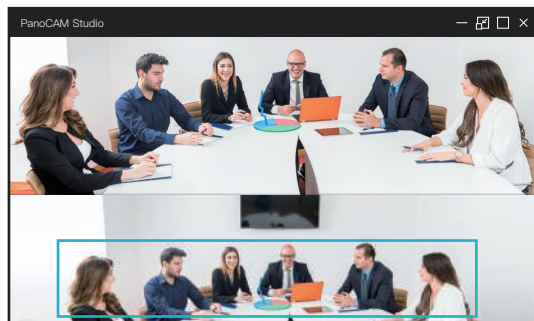

Body-Fit Mode

See the whole meeting room while focusing on all the participants simultaneously.

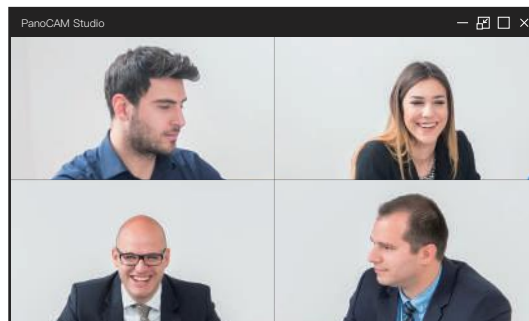

Grid Mode

See closeups of 4 key participants simultaneously, each in their own quadrant.



Presentation Mode

Focus on the whiteboard and the active presenter at the same time.

• Five video layouts

The AD-SC25 offers layout options to suit every communication scenario, catering to different meeting spaces and number of attendees.

■ AD-SC25



Auto-track the change of positions



Auto-track the change of attendee numbers




• Auto-tracking

The AD-SC25 tracks speakers as they move about the room, and automatically zoom in and out along the changing number of attendees.


■ AD-SC25

• Type-C Connection

Type-C connection enables seamless operation for a wide range of devices.

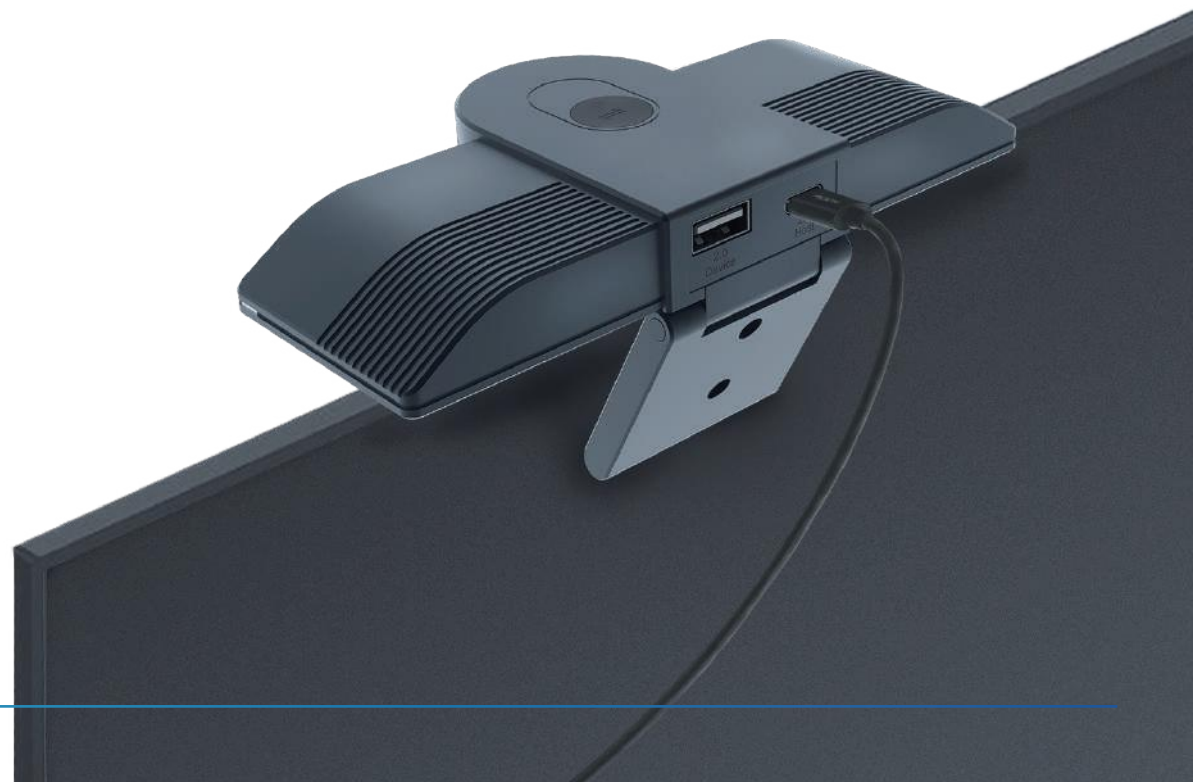

■ AD-SC25

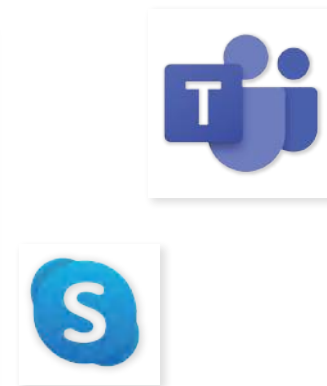

Works with the popular video conference software like Zoom, Skype, Teams, and Cisco Webex etc.

Specification

Camera

Effective Pixel	12 MP
Video System	H.264/MJ (30fps): (1)3840*2160; (2)2560*1440; (3)1920*1080; (4)1280*720; (5)1024*576; (6)960*540; (7) 800*600; (8)640*480; (9)640*360; (10)480*270; (11)352*288; (12)320*240; YUV2 (30fps) : (1)640*480; (2)640*360; (3)480*270; (4) 352*288; (5)320*240
Encode Format	MJPEG, H.264, YUY2
Focus	Fixed
Depth of Field (DOF)	0.5~5m
Maximum Field of View (FOV)	180°

Microphone

Quantity	2 Arrays
Pick-up Distance	0~4m

I/O Port

USB Type-C	1
USB Type-A	1

Physical Specification

Dimensions	144.1x73x25.7 mm
Package Dimensions	TBD
Net Weight	TBD
Gross Weight	TBD


Accessories

USB Cable	1
User Manual	1

Environment

Operating Environment	0°C~40°C
Humidity	10%~90%RH
Storage Temperature	-20°C~60°C
Storage Humidity	10%~90%
Altitude	Below 5000 meters

 Website: <https://adisplay.dk/>

 Email: salg@avd.dk
