



4K 180° Panoramic Camera



• 180° Field of view

The panoramic full-room coverage makes the most of your limited space with full-picture immersive technology that provides wall-to-wall coverage.





- Triple 12 MP cameras
- 4K UHD clarity

With the advanced optics and breakthrough technology, the AD-SC25 delivers vividly superior video conferencing. The 4K UHD resolution sets redefines crispness and clarity for your remote collaboration experience.





Manual Mode



Presentation Mode



Compose Mode



Body-Fit Mode



Grid Mode



1-click video layout switch

Free from special training or complicated software operations. Simply tap the top of the camera to switch video layout.







Combining a panoramic view with closeups, you can view the whole room while seeing 6 key participants in closeup.





Zoom into a specific area anywhere in the room.


Five video layouts

The AD-SC25 offers layout options to suit every communication scenario, catering to different meeting spaces and number of attendees.



■ AD-SC25





See the whole meeting room while focusing on all the participants simultaneously.



Grid Mode

See closeups of 4 key participants simultaneously, each in their own quadrant.



Presentation Mode

Focus on the whiteboard and the active presenter at the same time.

Five video layouts

The AD-SC25 offers layout options to suit every communication scenario, catering to different meeting spaces and number of attendees.





Auto-track the change of positions



Auto-track the change of attendee numbers



Auto-tracking

The AD-SC25 tracks speakers as they move about the room, and automatically zoom in and out along the changing number of attendees.




Type-C Connection

Type-C connection enables seamless operation for a wide range of devices.







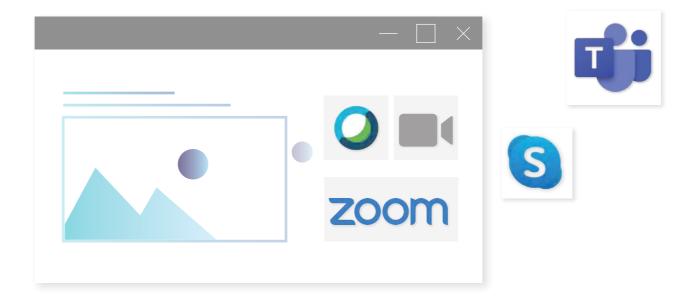

Works with the popular video conference software like Zoom, Skype, Teams, and Cisco Webex etc.

Specification

ADisplay[®]

Camera

12 MP Effective Pixel

Video System H.264/MJ (30fps): (1)3840*2160; (2)2560*1440; (3)1920*1080; (4)1280*720; (5)1024*576; (6)960*540;

(7) 800*600; (8)640*480; (9)640*360; (10)480*270; (11)352*288; (12)320*240;

YUV2 (30fps): (1)640*480; (2)640*360; (3)480*270; (4) 352*288; (5)320*240

Encode Format MJPG, H.264, YUY2

Focus Fixed Depth of Field (DOF) 0.5~5m Maximum Field of View (FOV) 180°

Microphone

Quantity 2 Arrays Pick-up Distance 0~4m

I/O Port

USB Type-C USB Type-A

Physical Specification

144.1x73x25.7 mm Dimensions

Package Dimensions TBD Net Weight TBD Gross Weight TBD

Accessories

USB Cable User Manual

Environment

Operating Environment 0°C~40°C 10%~90%RH Humidity Storage Temperature -20°C~60°C 10%~90% Storage Humidity

Altitude Below 5000 meters AV Distribution A/S Møllevangen 14 7550 Sørvad +45 8613 0000

Website: https://adisplay.dk/



Email: salg@avd.dk